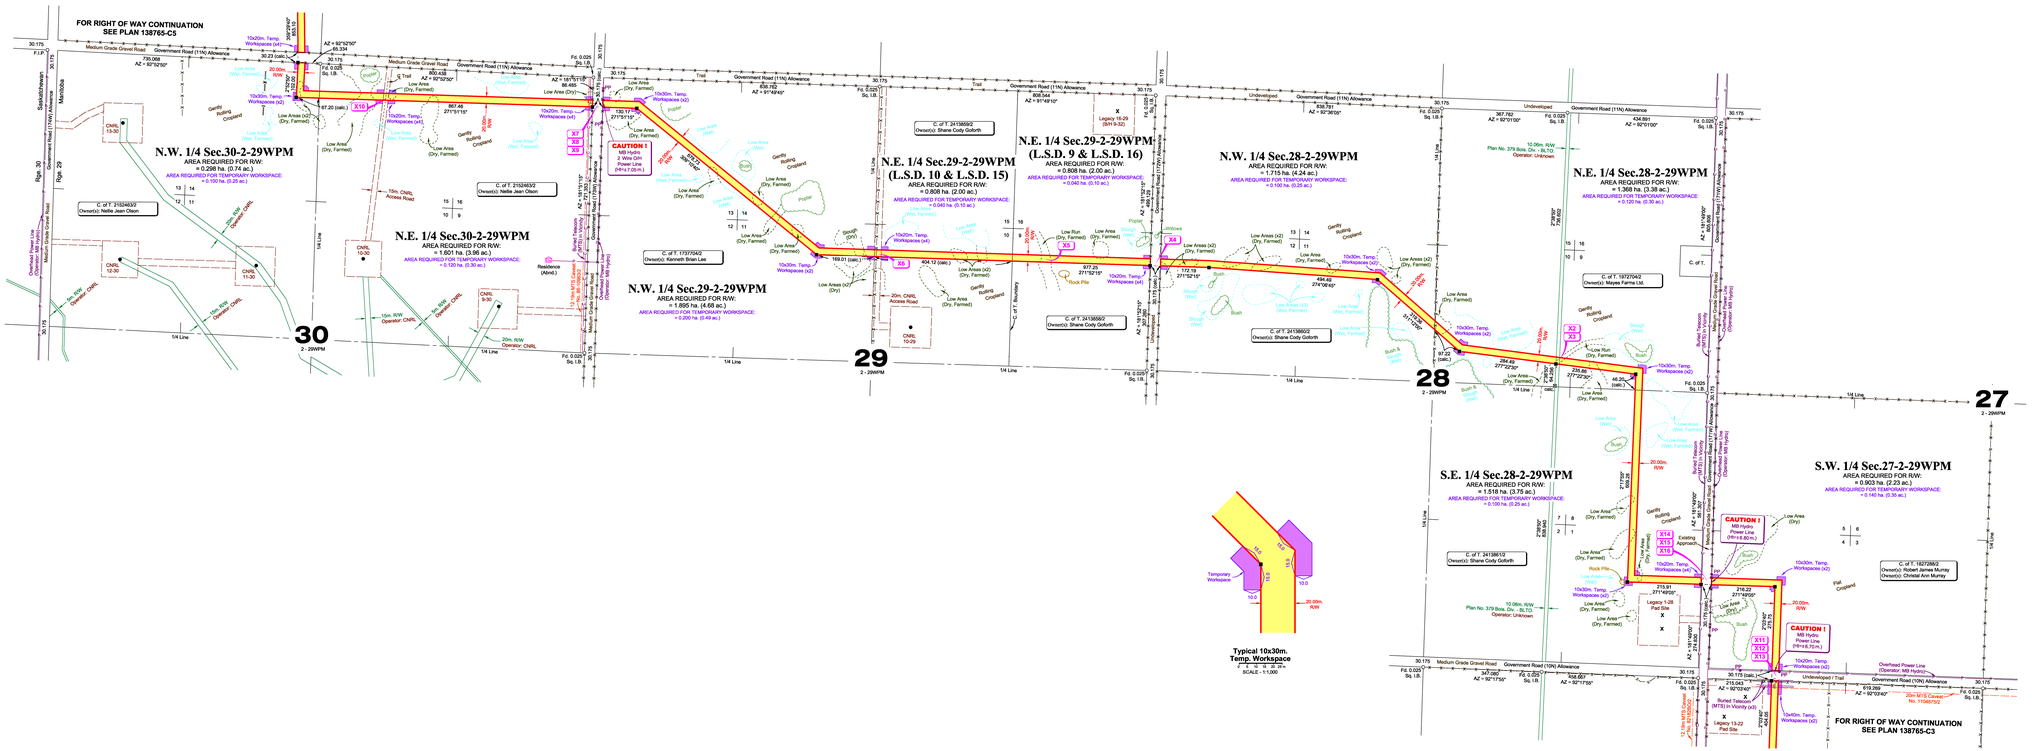

PIPE SPECIFICATIONS				
Nominal Pipe Size	4.5 in. to 1	mm. mm.	Cathodic Protection	
			Max. Working Pressure	kPa
Spec.			Test Pressure	kPa
CSA#			Material to be Conveyed	
External Coating			Casing	
Internal Coating			% of SMYS	%
	Method of Installation		Minimum Depth - (meters)	
Access Route			(1.8m.)	
Undeveloped Gov't Nrkw.			(1.8m.)	
Developed Gov't Nrkw.			(1.8m.)	
Other Pipe			(0.9m.)	
Canals			(1.8m.)	
Water Courses			(1.8m.)	
Other				

CROSSING TABLE

Drawing No.	Description	Status	Location
X1	~~Government Road (10N) Allowance (M.G.G.R.)~~	~~Deleted Rev 1~~	~~Between N.E. 29 & S.E. 29-2-29WPM~~
X2	Low Run (Dry, Farmed)	Issued Rev 3	N.E. 28-2-29WPM
X3	12.0m. R/W - Plan No. 379 Bos. Div. - BLTO. - Operator: Unknown	Issued Rev 3	N.E. 28-2-29WPM
X4	Undeveloped Government Road (17TW) Allowance	Issued Rev 3	Between N.W. 28 & N.E. 28-2-29WPM
X5	Low Run (Dry, Farmed)	Issued Rev 3	N.E. 29-2-29WPM
X6	20m. CNRL Access Road (Not Constructed)	Issued Rev 3	N.E. 29-2-29WPM
X7	Overhead Power Line - Operator: MB Hydro	Issued Rev 3	Between N.W. 29 & N.E. 30-2-29WPM
X8	Government Road (17TW) Allowance (M.G.G.R.)	Issued Rev 3	Between N.W. 29 & N.E. 30-2-29WPM
X9	12.15m. MTS Canal No. BL10983 - Buried Telecom Cable	Issued Rev 3	N.E. 30-2-29WPM
X10	15m. CNRL Access Road	Issued Rev 3	N.E. 30-2-29WPM
X11	Buried Telecom (MTS) Cable	Issued Rev 1	Between N.W. 28 & S.W.27-2-29WPM
X12	Undeveloped Government Road (10N) Allowance (Trail)	Issued Rev 1	Between N.W. 28 & S.W.27-2-29WPM
X13	Overhead Power Line - Operator: MB Hydro	Issued Rev 1	Between N.W. 28 & S.W.27-2-29WPM
X14	Overhead Power Line - Operator: MB Hydro	Issued Rev 1	Between S.W. 27 & S.E.28-2-29WPM
X15	Government Road (17TW) Allowance (M.G.G.R.)	Issued Rev 1	Between S.W. 27 & S.E.28-2-29WPM
X16	Buried Telecom (MTS) Cable	Issued Rev 1	Between S.W. 27 & S.E.28-2-29WPM

* The revision stated in the Status column refers to the Construction Plan revision.

MLS AFFIDAVIT

I certify that the survey represented by this plan is correct to the best of my knowledge.

Manitoba Land Surveyor

OPERATOR :
EOG RESOURCES CANADA INC.

Total length of right-of-way along posted boundary : 5.58 km
Crossings associated with this drawing: 15
Crossing plans required : 15
(Crossing plans issued for foreign crossings only)

LEGEND

Placed Wooden Hub / Deflection Point show thus:	△
0.025 x 0.025 sq.lf shown thus:	■
Survey Monuments Found shown thus:	⊙
Well heads found shown thus:	⊕
Marker Posts shown thus:	Mp.
Counter Sunk Posts shown thus:	c.s.
Right - of - Way boundary shown thus:	

NOTES

- All Marker Posts placed are 0.3 metres inside the GRA unless shown otherwise
- Right-of-way to be filed is 20.00 metres in perpendicular width throughout unless shown otherwise.
- Azimuths are grid and are referred to UTM projection, NAD 83 (Zone 14) datum and are derived by G.N.S.S.
- To the best of our knowledge the closest known Residence is 0.80 km.
- To the best of our knowledge the closest known Surface Development (Residence) is 0.90 km.
- The closest urban center is the Town of Pierson 3.1km. North-East of the pipe line.

DISCLAIMER:

This plan represents the best information available at the time of survey. Altus Geomatics Manitoba and its employees take no responsibility for the location of any underground pipes, conduits, or facilities, whether shown on or omitted from this plan. Facilities shown on this plan are for informational purposes only. Prior to any construction on lease or access road, EOG RESOURCES CANADA INC., MTS Communications Inc., Manitoba Hydro, and Manitoba Hydro-Gas Operations **MUST** be contacted for location of any underground facilities that may exist.

NO.	REVISIONS	INITIALS	DATE
1	Revised R/W Route (S.W. 27 & S.E. 28)	CM - AV - PFS	Dec. 6, 2012
0	Issued	GA/CM - AV - PFS	Sept. 6, 2012

eog resources

CONSTRUCTION PLAN
of
RIGHT-OF-WAY

In
S.W. 1/4 Sec. 27,
S.E. 1/4 Sec. 28,
N. 1/2 Sec. 28,
N. 1/2 Sec. 29
&
N. 1/2 Sec. 30
Twp.2 - Rge.29WPM

Rural Municipality of Edward
2012

0 50 100 200 300 400 500m
Scale - 1 : 5000

Altus Geomatics Manitoba
Toll Free: 1-800-460-6205
www.altusgeomatics.com

AFE No: 11HD405
Client File No: 9350 1020 | SEGMENT: C4
File : 138765PL-C4-R1
Job: 138765-V
Survey Date : July 13,2011 to November 13, 2012